

## VAPOR TIGHT





### SPECIFICATIONS



AVERAGE RATED LIFE	>50,000 hrs
HOUSING	Plastic
POWER	100-277VAC
ORIENTATION	Universal
LENS	Frosted
COLOR (K)	4000K, 5000K
INGRESS RATING	IP66

### BENEFITS

- Eliminates lamp and ballast replacement
- Longer life and lower maintenance costs
- Directional, high lumen output
- Enclosed Design is wet location rated
- Mercury and Lead free, as well as UV and IR free
- Instant on, no warm up or start up time

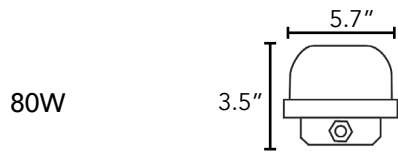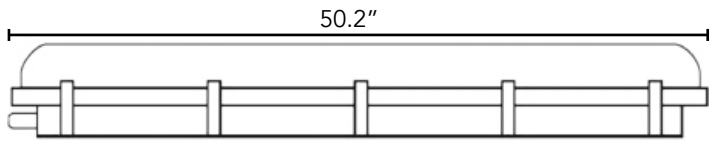

80W

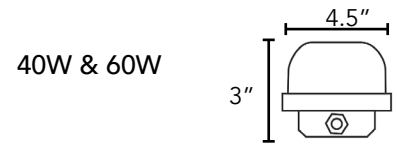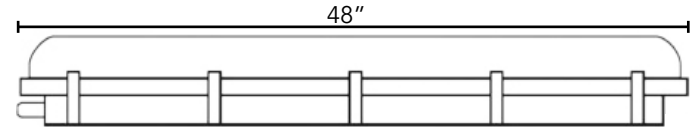

40W & 60W

### APPLICATION INFORMATION

Applications	Market Segments
- Wet Locations	- Industrial
- Warehouse	- Commercial
- Garage	- Municipal

### Application Notes

1. Operating temperature range between -20°C and +40°C (-4°F and +104°F)
2. Not for use with emergency light fixtures or exit lights
3. Suitable for wet locations

### CERTIFICATIONS



LM79 reports and IES files are available upon request.

Based on 12 hours of use per day.

# VAPOR TIGHT

## ORDERING INFORMATION

Order Code	Part Number	Wattage (W)	Voltage (V)	CCT <sup>1</sup>	Typical Lumens <sup>2</sup>	CRI <sup>3</sup>	Dim	Weight (lbs)	Case Quantity	DLC QPL	Lighting Facts
K9R5	VT4-40-40-MV	40	100-277	4000	4200	>80	NO	4.25	8	YES	YES
K9R6	VT4-40-50-MV	40	100-277	5000	4200	>80	NO	4.25	8	YES	YES
K9R7	VT4-60-50-MV	60	100-277	5000	6500	>80	NO	4.25	8	YES	YES
K9R8	VT4-80-50-MV	80	100-277	5000	8300	>80	NO	5.9	6	YES	YES

1. Thermally stable typical CCT ( $\pm 10\%$ ) 2. Thermally stable typical lumens ( $\pm 10\%$ ) 3. CRI - Color Rendering Index

For the most up-to-date specifications and detailed installation instructions, visit [kobielectric.com](http://kobielectric.com).